




TELSEC® 2000RME (FRONT VIEW)

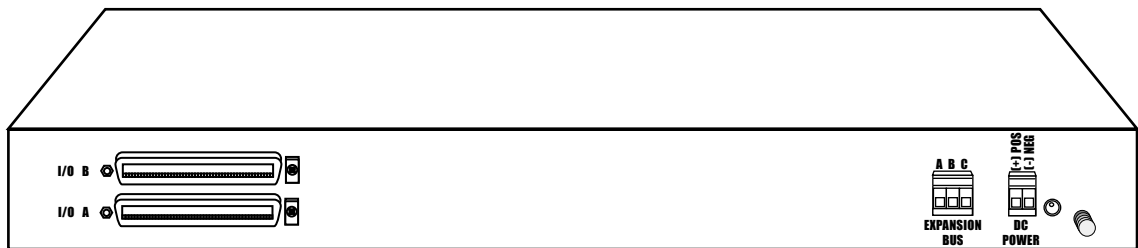

TELSEC® 2000RME (REAR VIEW)

The rack-mounted expansion module allows the TELSEC® 2000RM (p/n 150618) or TELSEC® 1500WM (p/n 150617) to expand to an additional 32 inputs (analog or digital) and 16 digital outputs. The unit fits in a standard telephony 19" or 23" rack. This slave unit is easy to install and configure, allowing the end-user to increase the alarm and control points with little effort.

SPECIFICATIONS

- Part Number:** 150640
- Inputs 32:** 0-5 VDC, 4-20 mA or Wet/Dry Contact Closures.
16 Outputs, 16 Form A Contact Closures.
- Electrical:** +24 or -48 VDC 1 amp. max. Optional 120/220 VAC, 60Hz, 0.5 amp.
- Terminals:** Two (2) 50 PIN amphanel connectors for outputs, discrete and analog inputs. Plug-in terminals for power and networking.
- Environmental:** Operating temperature 0° to 140°F (-18° to 60°C)
Storage temperature -40° to 250°F (-40° to 121°C)
0-95% RH Non-condensing.
- Dimensions:** 17" W x 10.5" D x 1.75" H (432mm W x 267mm D x 45mm H)
- Shipping Weight:** 4 lb (1.8kg)
- Warranty:** One (1) year