


**EXTERIOR VIEW**

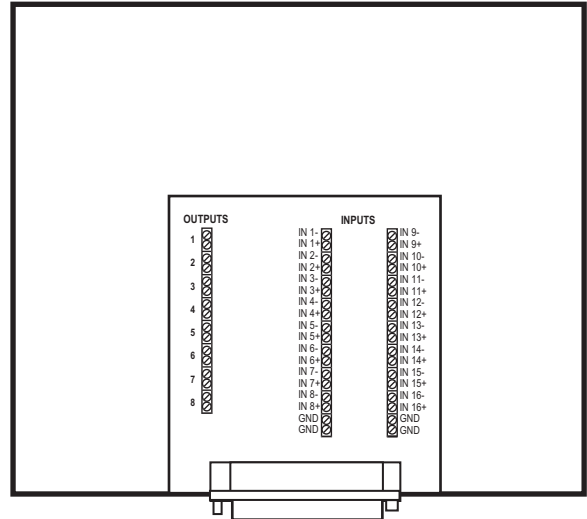

**INTERIOR VIEW**

The CIM module is designed to allow for low voltage termination of environmental control and monitoring devices. The module interfaces with either the TELSEC® 1500WM or 2000RM through the 50-pin Amphenol® connector. Up to 8 digital outputs and 16 universal inputs can be wired to the CIM. The CIM's primary function is to provide terminals for shelter manufacturers to terminate the control and monitoring wiring at the factory. The module can be wall mounted or incorporated into a shelter's control panel.

### Specifications

**Part Number:** 150642

**Terminals:** One (1) 50-pin Amphenol® connector for connection to the TELSEC® 1500 or 2000. Thirty six (36) screw terminal positions for input wiring and sixteen (16) screw terminal positions for output wiring. Wiring terminals will accept up to 12 AWG wire.

**Dimensions:** 7"W X 8"H X 2"D (178mm W x 203mm H x 51mm D)

**Shipping Weight:** 2 lb (907g)

**Warranty:** One (1) Year

**Quest Controls, Inc.**

208 9th Street Drive W. Palmetto, FL 34221  
Tel: (941) 729-4799 Fax: (941) 729-5480  
www.questcontrols.com